### **FCIA Webinar**

### Who is FCIA Barrier Management Systems © FCIA 2017



## "TOTAL FIRE PROTECTION"

- Effective Compartmentation
  - Fire Barriers, Fire Walls/Floors, Smoke Barriers
  - Firestopping, Fire Dampers, Swinging and Rolling Fire Doors, Fire Rated Glazing
- Detection & Alarm Systems
- Sprinkler Suppression Systems
- Education & Egress-
  - Building Owners & Managers, Building Occupants and Firefighters









## FCIA – Firestop Contractors International Association

- FCIA Members
  - Firestop Contractors
  - Firestop Manufacturers
  - Firestop Consultants



- Firestop Distributors, Reps, Friends
- FREE MOP/Spec Specifiers @ AE, Independent
- FREE Life Safety Digest
- 3<sup>rd</sup> Party Contractor/Inspection Company Accreditation Programs
- Chair, ASTM Inspection Standards
- Tools for Specifiers

- NFPA 5000 101- Chapter 8
- National Building Code Canada
- UAE Fire and Life Safety Code Chapter
- International Codes
  - New and Existing Buildings International Building Code Chapter 7
  - International Fire Code Chapter 7
- Minimum requirements Construction & Maintenance

- Compartmentation Codes US
  - Fire Resistance Time, in minutes or hours that materials or assemblies have withstood a fire exposure as determined by tests, methods based on tests, or this code .... NFPA, Ch 8. ICC adds... "Systems"

- Compartmentation Codes US
  - Ch. 8 NFPA & Ch. 7 IBC
    - IBC & NFPA ASTM E 119, UL 263 Fireresistance-ratings
    - **IBC Ch. 7 Fire Barrier** Hourly Rated
    - **IBC Ch. 7 Fire Wall** Fire Rating, structural independence
    - Ch. 7 IBC Fire Partition Rated, not continuous.
    - Ch. 8 NFPA/NFPA 221–High Challenge Fire Walls

- Fire Barriers
  - Fire Area Separations
  - Mixed Use Occupancies
  - Incidental Uses
  - Hazardous Area Separations
  - Exit Enclosures
  - Shaft enclosures
  - Horizontal Exits
  - Corridor Walls NFPA

- Smoke Barriers
  - Healthcare
  - Other Occupancies
- NFPA 101 Smoke Resistance & Firestops
  - Ch. 8 NEW Addition
  - NOT in Occupancy Chapters yet
- IBC Ch. 7
  - Quantified L Rating for Firestops

- Compartmentation Codes US
  - Smoke Barrier Firestopping for Continuity
    - IBC Hourly Rated, "L" Rating
      - <5cfm/sf (IBC 2006)
      - < 50 cfm, 100sf of Wall Area (IBC 2009)
    - NFPA ... 'restricting the passage of smoke'... no quantified "L" Rating ... YET
      - Continuous, Barrier to Barrier, ... through concealed spaces,
      - Not always fire-resistance-ated.

### – Smoke Partition

- IBC Continuous barrier, not rated...'retard'.
- NFPA Continuous membrane that is designed to form a barrier to *limit the transfer of smoke*....

- Build it Right
  - Walls / Horizontal Assemblies Continuity
    - Firestop Products Become Firestop Systems
      - Penetrations
      - Joints Head /Bottom of Wall Perimeter Joints
    - Fire & Smoke Damper Duct Systems
    - Fire Doors and Hardware Systems
      - Rolling & Swinging
    - Fire Rated Glazing

### Continuity

### **Effective Compartmentation Features**











## Barrier Continuity SYSTEMS

- **Products Become Systems Spec References** 
  - Fire & Smoke Barriers ASTM E 119, UL 263
  - Firestopping ASTM E 814 / UL 1479, ULC-S-115, UL 2079, E-1966, E-2307, E-2837, ...test method..."
  - Fire/Smoke Dampers UL 555, UL 555S
  - Swing/Rolling Fire Doors UL 10B, 10C
  - Fire Rated Glazing UL 9
- SYSTEM Testing = Suitability statement for use of a product in a specific <u>system</u> application



Firestopping for Continuity Products become SYSTEMS

- After Installation...
- 'Field Erected Construction...Tested to...'
  - Standards ASTM E814/UL 1479–UL 2079, ASTM
    E 1966, ASTM E 2307, ULC S-115, FM 4990
  - F Rating Flame
  - T Rating Temperature
  - H Rating Hose
  - L Rating Smoke



W Rating – Water

Graphics – 3M



### Products become Systems Hose Stream = Shock Test




## Barrier Continuity Products become SYSTEMS

- Fire Rated Systems Directories
  - FM Approvals
  - Intertek
  - UL Fire Resistance Directory

Systems Selection & Analysis...Not as easy as it looks...





## Engineering Judgments/EFRRA

- Variances to Systems at Site ? Now What...
  - First Action in Process
    - Find another system Same Manufacturer
    - Find another system Different Manufacturer
    - If no system exists in either case....
  - Second Action
    - Engineering Judgment "EJ"
    - Equivalent Fire Resistance Rated Assembly "EFRRA"
  - Based on engineering, IFC Protocol

### **International Firestop Council – Manufacturers – firestop.org**

### IFC Guidelines for Evaluating Engineering Judgment Guidelines

'Construction industry professionals, building officials, fire officials, firestop contractors and other stakeholders need appropriate guidelines for evaluating and using such judgments.

As such, IFC developed *Recommended IFC Guidelines for Evaluating FireStop Systems in Engineering Judgments.* 

### **IFC EJ Guidelines -** Engineering Judgments for firestop systems should:

#### 1. Not be used in lieu of tested systems when available;

- 2. Be issued only by a firestop manufacturer's qualified technical personnel or in concert with the manufacturer by a knowledgeable registered Professional Engineer, Fire Protection Engineer, or an independent testing agency that provides listing services for firestop systems;
- 3. Be based upon interpolation of previously tested firestop systems that are either sufficiently similar in nature or clearly bracket the conditions upon which the judgment is to be given. Additional knowledge and technical interpretations based upon accepted engineering principles, fire science and fire testing guidelines (e.g. ASTM E 2032 Standard Guide for Extension of Data from Fire Endurance Tests, ULC Subject C263E Criteria for Use in Extension of Data from Fire Endurance Tests, or ASTM E2750 Standard Guide for Extensions of Data for Penetration Seals) may also be used as further support data;

### **IFC EJ Guidelines**

**Engineering Judgments for firestop systems should:** 

- 4. Be based upon full knowledge of the elements of the construction to be protected, the understanding of the probable behavior of that construction and the recommended firestop system protecting it were they to be subjected to the appropriate Firestop Standard Fire Test method for the rating indicated on the Engineering Judgment;
- 5. Be limited only to specific conditions and configurations upon which the engineering judgment was rendered and should be based upon reasonable performance expectations for the recommended firestop system under those conditions;
- 6. Be accepted only for a single, specific job and project location and should not be transferred to any other job or project location without thorough and appropriate review of all aspects of the next job or location's circumstances.

### **IFC EJ Guidelines -** Basic Presentation Requirements Proper EJ's should:

- **1.** Be presented in appropriately descriptive written form with or without detail drawings where appropriate;
- 2. Clearly indicate that the recommended firestop system is an EJ;
- **3.** Include clear directions for the installation of the recommended firestop system;
- 4. Include dates of issue and authorization signature as well as the issuer's name, address and telephone number;
- 5. Reference tested system(s) upon which design (EJ) is based on;
- 6. Identify the job name, project location and firm EJ is issued to along with the non-standard conditions and rating supported by the EJ;

### **IFC EJ Presentation Guidelines – What's Seen?**

- 7. Have proper justification (i.e. UL, Intertek or other independent laboratory system(s) and or opinions);
- 8. Provide complete descriptions of critical elements for the firestop configuration. These should include, but not be limited to the following:
- a. Basic, Common
  - Type(s) of assembly used or being penetrated;
  - Rating supported by the EJ.
- **b.** Through Penetrations
  - Penetrating item(s) (type, size, etc.);
  - Annular space requirements, (minimum, maximum, actual, nominal, etc.)
  - Opening size;
  - Firestop product(s) to be used, type and amount (thickness if applicable);
  - Accessory items(s) (i.e. anchors, backing material, etc.)

c. Joints

- Joint Width (installed width, nominal)
- Movement Capability;
- Movement Class (thermal wind sway, seismic);
- Accessory item(s) (i.e. insulation type, thickness and compression, etc.)

### **IFC EJ Presentation Guidelines – What's Seen?**

**d**•**Duct Enclosure Systems – SEE www.Firestop.org** 

- e• Firestop System annular space dimensions, floor/wall construction, design number, components, installed thickness.
- f. Perimeter Fire Barrier Systems
  - Type(s) of assembly used or being penetrated;
  - Hourly Rating required
  - Closest Listed System upon which the EJ is based
  - Joint Width
  - Static or Dynamic
  - Safing Insulation Types), thickness and compression, etc.
  - Five Basic Principles
  - 1. Mechanical Attachment of the Spandrel Insulation
  - 2. Protection of the Mullions
  - **3.** Compression Fitting and Orientation of the Safing Insulation
  - 4. Installation of a Reinforcement Member(s), stiffener, at the safe-off area behind the spandrel insulation.
  - 5. Firestop Coating, type, thickness,

### **IFC EJ Presentation Guidelines – What's Seen?**

f• Continuity Head-of-Wall Joints

- Joint Width, (installed width, nominal)
- Movement Capability
- Movement Class (thermal, wind sway, seismic)
- Accessory Item(s) (i.e. insulation type, thickness, compression, etc.)

IFC recommends that these guidelines be considered when evaluating whether any firestop system engineering judgment meets minimal requirements. Questions concerning the EJ request should be addressed to the initiator of the judgment.

### INSTALL FIRESTOP SYSTEM Firestop Sealant, MW installation to Tested and Listed System Limits = Firestop System



STI Graphic

# Firestopping for Continuity Firestop Products

- Sealants
  - Silicone, Latex, Intumescent
- Wrap Strips
  - "Thick, Thin, Wide, Less Wide"
- Putties
- Pillows
- Composite Sheets
- Bricks / Plugs
- Pre Fabricated Kits
- Mortar
- Spray Products










Firestop Materials, Systems Spec Physical Properties Needed

- Serve Building Needs
  - Smoke
  - Germs
  - Chemical Resistance Cleaning?
  - Chemical, Biological, Radiation?
- Product Types
  - Intumescent, Latex, Silicone
  - Ablative
  - Endothermic




Graphics – 3M, STI, Nelson

## Barrier Continuity I – Installation – Listed Systems

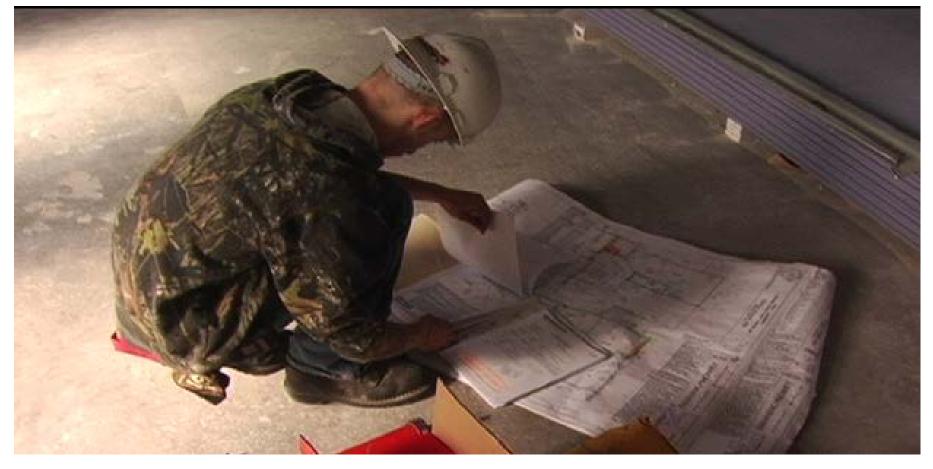

### I- Installation Who's Responsible, How to Choose???

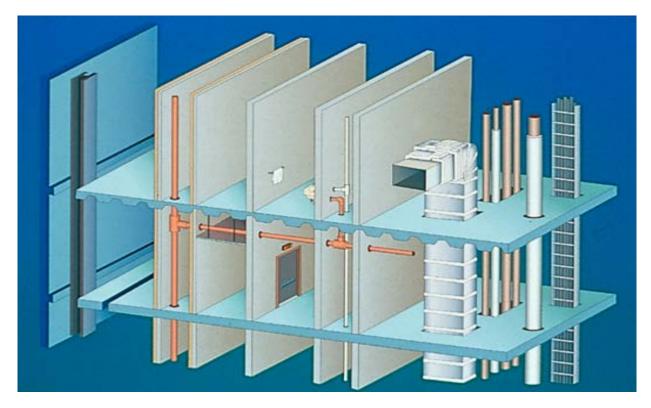


**Graphics – STI** 

## Spec Contractor Qualifications


- FM 4991 Standard for the Approval of Firestop Contractors
- UL Qualified Firestop Contractors
- Other Industries???
- FM 4991/UL-ULC CONTRACTORS UNDERSTAND SYSTEMS & DOCUMENTATION

## Why Contractor Qualifications?

- Built right the first time...
- Documentation
- SYSTEMS Selection, Analysis, As-Builts
  - F, T, L, W Rated Systems
  - Tolerances Annular Space Sizes, Angles
  - Gap Sizes Undercuts Framing
  - Anchors Spacing Hardware
  - Closers Activation Sensors, more...

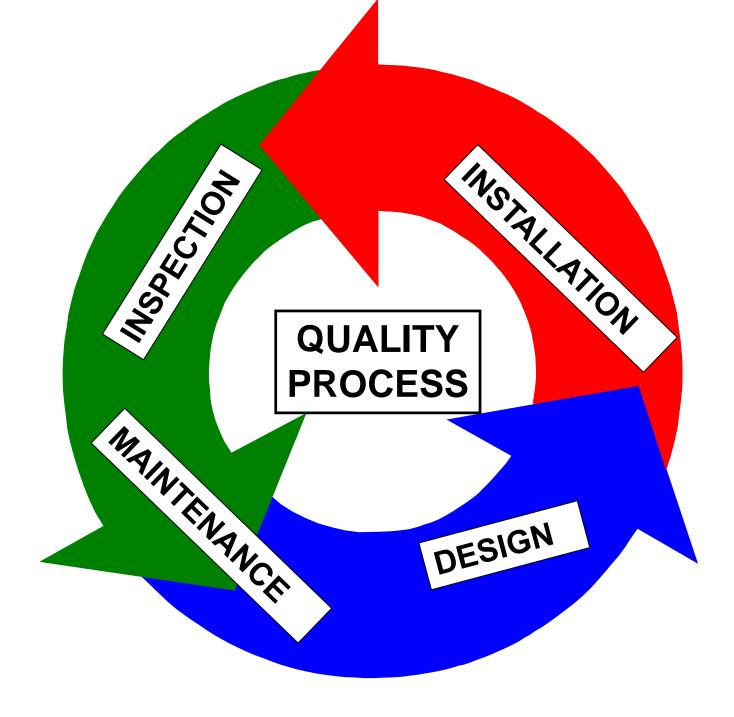


### Installation & Inspection

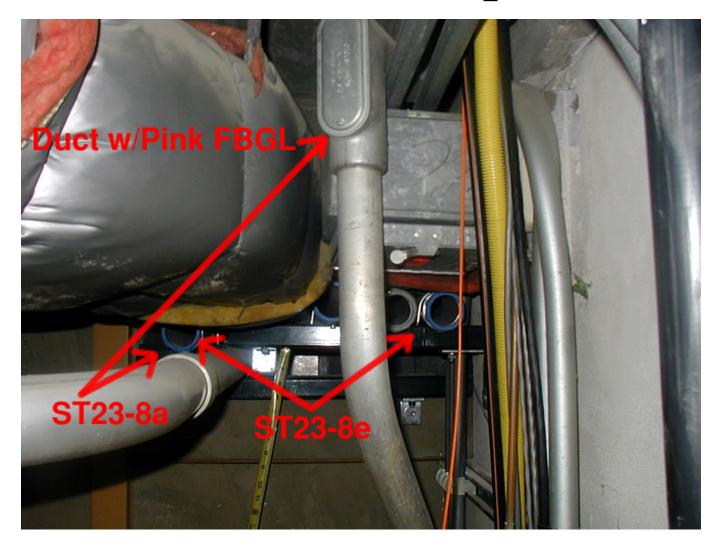

## I – Inspection – Options

- Contractor Self Inspection
  - Verify Management System validity
- Manufacturer Inspection?
  - Does not exist ... Survey, maybe
- Special Inspection/Commissioning
  - Independent 3<sup>rd</sup> Party
  - Destructive, Non Destructive
  - Specified Frequency
  - Inspection Agency Accreditation IAS AC 291

## M – Maintenance (& Management)

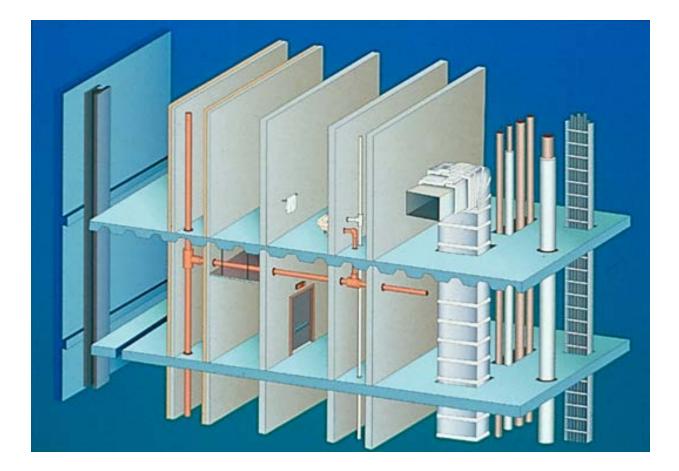

# Fire Code Requires Fire & Smoke Resistance Maintenance

- International Fire Code
- NFPA 101
- National Building Code of Canada
- UAE Fire and Life Safety Code of Practice
- Minimum Requirements Stated
- Frequency

## National Fire Protection Association - NFPA 101-2012

### • SECTION 4.5.8 Maintenance, Inspection, and Testing.

4.5.8.1 Whenever or wherever any device, equipment, system, condition, arrangement, level of protection, fire-resistive construction, or any other feature is required for compliance with the provisions of this Code, such device, equipment, system, condition, arrangement, level of protection, fire-resistive construction, or other feature shall thereafter be continuously maintained in accordance with applicable NFPA requirements or requirements developed as part of a performance-based design, or as directed by the AHJ. [101:4.6.12.1]

# **National Fire Protection**

#### **Association - NFPA 101-2012**

- 4.5.8.2 No existing life safety feature <u>shall be removed or</u> <u>reduced</u> where such feature is a requirement for new construction. [101:4.6.12.2]
- 4.5.8.3\* Existing life safety features obvious to the public, if not required by the Code, *shall be either maintained or removed*. [101:4.6.12.3]
- 4.5.8.4 Any device, equipment, system, condition, arrangement, level of protection, fire-resistive construction, or any other feature requiring periodic testing, inspection, or operation to ensure its maintenance <u>shall be tested, inspected, or operated</u> as specified elsewhere in this Code or as directed by the AHJ. [101:4.6.12.4]
- 4.5.8.5 Maintenance, inspection, and testing <u>shall be performed</u> <u>under the supervision of a responsible person who shall</u> <u>ensure</u> that testing, inspection, and maintenance <u>are made at</u> <u>specified intervals</u> in accordance with applicable NFPA standards or as directed by the AHJ. [101:4.6.12.5]

# International Fire Code Maintenance

#### **SECTION 703** FIRE-RESISTANCE-RATED CONSTRUCTION



**703.1** Maintenance. The required fire resistance rating of fireresistance rated construction (including walls, fire stops, shaft enclosures, partitions, smoke barriers, floors, fire resistive coatings and sprayed fire resistant materials applied to structural members and fire resistive joint systems) <u>shall be maintained</u>. Such elements shall be <u>visually inspected by the owner annually</u> and properly repaired, restored or replaced when damaged, altered, breached or penetrated.

**Openings** made therein for the passage of pipes, electrical conduit, wires, ducts, air transfer openings, **and holes** made for any reason **shall be protected with approved methods** capable of resisting the passage of smoke and fire.

### 2015 International Fire Code Maintenance

#### SECTION 703 FIRE-RESISTANCE-RATED CONSTRUCTION

**703.1 Maintenance.** The required *fire-resistance rating* of fire-resistance-rated construction, including, but not limited to, walls, firestops, shaft enclosures, partitions, *smoke barriers*, floors, fire-resistive coatings and sprayed fire-resistant materials applied to structural members and fire-resistant joint systems, shall be maintained. Such elements **shall be visually inspected by the** *owner* **annually and properly repaired, restored or replaced where damaged, altered, breached or penetrated**. **Records** of inspections and repairs shall be maintained..



#### 2015 International Fire Code Maintenance SECTION 703

**FIRE-RESISTANCE-RATED CONSTRUCTION** 

**703.1 Maintenance. (continued)** Where concealed, such elements shall not be required to be visually inspected by the *owner* unless the concealed space is accessible by the removal or movement of a panel, access door, ceiling tile or similar movable entry to the space. Openings made therein for the passage of pipes, electrical conduit, wires, ducts, air transfer openings and holes made for any reason **shall be protected with** *approved* **methods** capable of resisting the passage of smoke and fire. Openings through fire-resistance-rated assemblies shall be protected by self- or automatic-closing doors of *approved* construction meeting the fire protection requirements for the assembly.



# 2015 International Fire Code Maintenance

**SECTION 703 FIRE-RESISTANCE-RATED CONSTRUCTION 703.1 Maintenance. (continued) 703.1.1 Fireblocking and draftstopping.** Required *Fireblocking* and draftstopping in combustible concealed spaces shall be maintained to provide continuity and integrity of the construction.

**703.1.2 Smoke barriers and smoke partitions.** Required *smoke barriers* and smoke partitions shall be maintained to prevent the passage of smoke. Openings protected with *approved* smoke barrier doors or smoke dampers shall be maintained in accordance with NFPA 105.

**703.1.3 Fire walls, fire barriers and fire partitions.** Required *fire walls, fire barriers* and *fire partitions* shall be maintained to prevent the passage of fire. Openings protected with *approved* doors or fire dampers shall be maintained in accordance with NFPA 80.



# FCAC F113-16 2018 International Fire Code

• 701.6 Owner's responsibility. The owner shall maintain an inventory of all **required** fire-resistance-rated and smoke *resistant* construction, and the construction included in Sections 703 through 707 and such construction shall be visually inspected by the owner annually and properly repaired, restored or replaced where damaged, altered, breached or penetrated.

# FCAC F113-16 2018 International Fire Code

- 701.6, Continued...PC2
- Records of inspections and repairs shall be maintained. Where concealed, such elements shall not be required to be visually inspected by the *owner unless the concealed space is accessible by the removal or movement of a panel, access door, ceiling* tile or similar movable entry to the space.

# FCAC F113-16 2018 International Fire Code

 703.1 Maintaining protection. Materials and firestop systems used to protect membrane- and through-penetrations in fireresistance- rated construction and construction installed to resist the passage of smoke shall be maintained.

#### FCAC F113-16 2018 International Fire Code Documentation Required

• 703.1 ... Continued. PC 1

The materials and firestop systems shall be securely attached to or bonded to the construction being penetrated with no openings visible through or into the cavity of the construction. Where the system design number is known, the system shall be inspected to the listing criteria and manufacturer's installation instruction.

#### UAE Fire and Life Safety Code of Practice Maintenance & Management

Chapter 1, SECTION 21 Firestopping

<u>21.15.2</u> The required fire resistance rating of installed firestop systems shall be visually inspected by the owner or owner's inspection agency annually. Damaged, altered or breached firestop systems shall be properly repaired, restored or replaced to comply with applicable codes as per the guidelines of Civil defense.

<u>21.15.3</u> Any new **Openings** made therein for the passage of through penetrants, **shall be protected with approved firestop system** to comply with applicable codes as per the guidelines of Civil defense.

#### National Fire Code of Canada

**National Fire Code of Canada** 

- Division B Part 2, Building and Occupant Fire Safety
  2.2.1.2 Damage to Fire Separations where fire separations are damaged so as to affect their integrity, they shall be repaired so that the integrity of the fire separation is maintained...
- FCIA Manual of Practice Appendix, Maintenance
  FCIA recommends Barrier Management for Effective Compartmentation and Structural Protection




#### Firestop Maintenance

#### • Maintenance

- Code Required
- How??
- How to keep Track Barrier Management Initiative
  - Paper
  - Software
  - Labeling



- NEW Buildings 07-84-00 Specs
  - www. FCIA .org
- Part I Focus on
  - Systems
  - Not Products
  - Manufacturers



• "Single Manufacturer to the greatest extent possible" – EJ's

- NEW Buildings 07-84-00 Specs – www. FCIA .org
- Part II Qualifications
  - FCIA Member in Good Standing, AND
  - FM 4991, Standard for the Approval of Firestop Contractors, OR
  - UL Qualified Firestop Contractor Program
    AND
  - Manufacturer Accredited, Approved, Trained

- NEW Buildings 07-84-00 Specs
  - www. FCIA .org
- Part II Qualifications Special Inspection
  - Special Inspection Agency
    - IAS AC 291 Accredited Special Inspection Agencies
  - Special Inspector Qualifications
    - FM Firestop Exam
    - UL Firestop Exam
    - AND
    - IFC Exam ASTM E 3038

- NEW Buildings 07-84-00 Specs
- Part III Execution
  - Special Inspection
    - ASTM E 2174 Penetrations
    - ASTM E 2393 Joints

# Built Right = Maintain Right WHEN SPECIFIED

- Reference 01-78-00 Closeout Submittals
  - 01 78 13 Completion and Correction List
  - 01 78 19 Maintenance Contracts
    - On Labels.... Call for Annual Survey
  - 01 78 23 Operation and Maintenance Data
  - 01 78 23.13 Operation Data
  - 01 78 23.16 Maintenance Data
  - 01 78 23.19 Preventative Maintenance Instructions

# Built Right = Maintain Right WHEN SPECIFIED

- Reference 01-78-00 Closeout Submittals
  - 01 78 29 Final Site Survey
  - 01 78 33 Bonds
  - 01 78 36 Warranties
  - 01 78 39 Project Record Documents
  - 01 78 43 Spare Parts
  - 01 78 46 Extra Stock Materials
  - 01 78 53 Sustainable Design Closeout
    Documentation

# Built Right = Maintain Right WHEN SPECIFIED

- Why Specifications Division 01-78-00?
  - Fire Resistance Inventory REQUIRED -
  - F-113-16 2018 International Fire Code
  - Section 703.1 becomes 701.1
    - Fire Rated Walls & Floors
    - Firestop Systems
    - Fire & Smoke Dampers
    - Fire Rated Rolling & Swinging Doors
    - Fire Rated Glazing

#### M–Barrier Management Systems

- Why Manage Barriers?
- International Fire Code
- International Property Maintenance Code

### M–Barrier Management Systems ICC's IPMC

#### **IPMC SECTION 703**

- **[F] 703.1 Fire-resistance-rated assemblies. The required** fire-resistance rating of fire-resistance-rated walls, fire stops, shaft enclosures, partitions and floors shall be maintained.
- [F] 703.2 Opening protectives. Required opening protectives shall be maintained in an operative condition. Fire and smokestop doors shall be maintained in operable condition. Fire doors and smoke barrier doors shall not be blocked or obstructed or otherwise made inoperable.

#### **International Existing Building Code**

### M–Barrier Management Systems Policies

- Barrier Management Policy
  - Inventory
  - Monitor
  - Permits
  - Management
  - Request Budget to Meet Code Requirements
  - Implement Maintenance
    - In House (Rules)
    - Outside Contractor (Rules)

### M–Barrier Management Systems Policies

- Barrier Management Policy
  - Inventory Items to Survey
  - Fire-Resistance-Rated Walls and Floors
    - Breaches for Penetrations, Joints, Doors, etc.
    - Wall not completed at new construction?
    - Wall removed above ceiling?

### M–Barrier Management Systems Policies

- "Where concealed, such elements shall not be required to be visually inspected by the owner unless the concealed space is accessible by the removal or movement of a panel, access door, ceiling tile or similar movable entry to the space.
- [IFC 2015, 703.1]

- Fire-Resistance-Rated Walls & Floors
  - Walls U, V 400, 900 Designs
  - Floors P Designs
  - Calculated Fire Resistance
  - Code Defined Fire Resistance 720
    - Firestop Systems
    - Fire & Smoke Dampers
    - Fire Rated Rolling & Swinging Doors
    - Fire Rated Glazing

M–Barrier Management Systems Operations

- Items to Survey
- Fire-Rated Doors Annually NFPA 80
  - Close and Latch
  - Holes
  - Attach at Frame
  - Undercut & Astragals
  - Labels Legible
  - Labels recertified, requirements of 3<sup>rd</sup> party certification agency

## M–Barrier Management Systems Operations

- Firestop Systems Not Concealed Only
- Through & Membrane Penetrations
  - Joints
    - Wall to Wall
    - Floor to Floor
    - Head Bottom of Wall
    - Continuity Head of Wall
  - Perimeter Fire Containment

M–Barrier Management Systems Operations

- Firestop Systems SYSTEMS
  - Visibly Comply with System
  - Visibly 'sealed'
  - Without openings
  - Firestop Materials & Systems
  - Securely Attached

M–Barrier Management Systems Items to Survey

Fire & Smoke, Ceiling, Radiation Dampers

- NFPA 80 –
- Initial Installation
- At 1 year, each 4 years,
- 6 years Hospitals Only
  - Fire Dampers
  - Smoke Dampers
  - Combination Fire/Smoke Dampers
  - Ceiling Dampers

M–Barrier Management Systems Items to Survey

- Fire Rated Glazing
  - Verify it's still fire rated
  - Glazing / Frame Attachment
  - Frame attached to wall
  - Glazing Marking as Built

M–Barrier Management Systems Items to Survey

- Fire Resistance Inventory Systems
  - Paper & Files
  - Spreadsheets
  - Software

# M–Barrier Management Systems Building Operational

- Barrier Management Policy
  - Repairs
    - As originally permitted and *approved*
    - As required by Fire Code, Existing Building Code
    - If SYSTEMS required, SYSTEMS REPAIRS
    - If no Systems, original materials.
    - Fire Official
    - Insurance Company

#### M–Barrier Management Systems

• Now it's your building....



Gleeson Powers Graphic

#### M–Barrier Management Systems

- Barrier Management
  - Issues...Budget???
  - Other Occupancies---Big Problem
  - Constant issues
  - Control?
  - Staff?
  - Manage?

#### Barrier Management HUB

- The HUB is Facility Director!
- HUB Controls Actions
  - C-Suite Execs Budgeted Yearly
  - Construction
    - In House Crews
    - Outside Contractors
  - I-T Department
    - In House Crews & Outside Contractors

#### Barrier Hub = Facility Director?

- YOU answer to...
  - Other AHJ's
  - C-Suite
  - Occupants, Students, Faculty, Patients
  - Building Official, Fire Marshal
  - Insurance Company
  - The Joint Commission
  - CMS Inspectors

# Barrier Management Policy Contents

- Annual Line Item Budget
- Rules of Engagement in Contracts
  - Internal Contracts
  - External Contracts
- Pre Construction Meetings
- Barrier Warnings Markings
- Violation Consequences
- Ongoing Management
- Staff Occupant Education





- **Contracts = Rules** 
  - Internal Contracts -
    - In House Departments similar to Outside Contractors
  - External Contracts
    - AIA Contract
    - Marked Fire Smoke Barrier Actions
    - Barrier Permits
    - Documentation Systems
    - Report


### M–Barrier Management Systems

- Barrier Inventory Elements
  - Life Safety Drawings
  - Existing Conditions Documented
  - Ongoing Survey Records
  - Deficiency Reports
  - Systems Documentation Control, Retrieval
- ALL FIRE PROTECTION FEATURES

### M–Barrier Management Systems

• Barrier Repair Examples

## **Gypsum Wallboard Repair Large Holes**

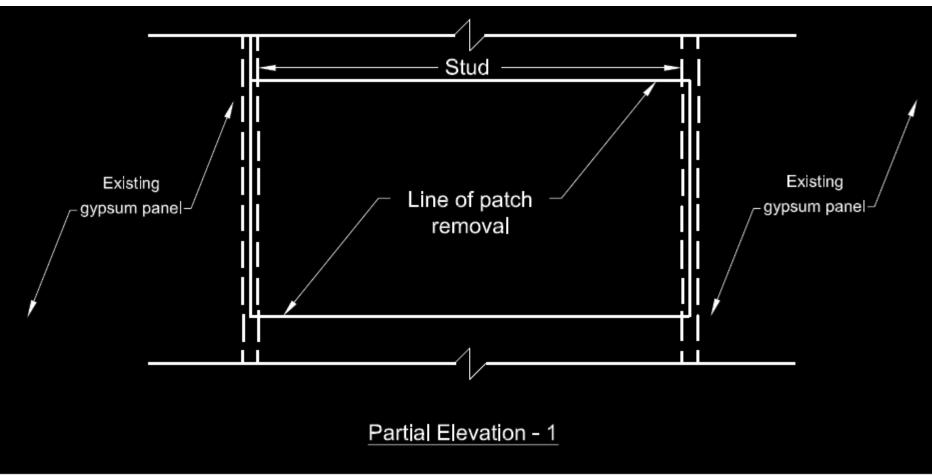


• USG Photo

## M–Barrier Management Systems

- Electronic Best Practice Elements
  - Action Oriented
    - Projects Specifications
    - Ongoing Surveys FCIA RPPS 2010-1
  - Action Reminders
  - In Process Status
  - Record Retrieval



### Sample Permit – Area

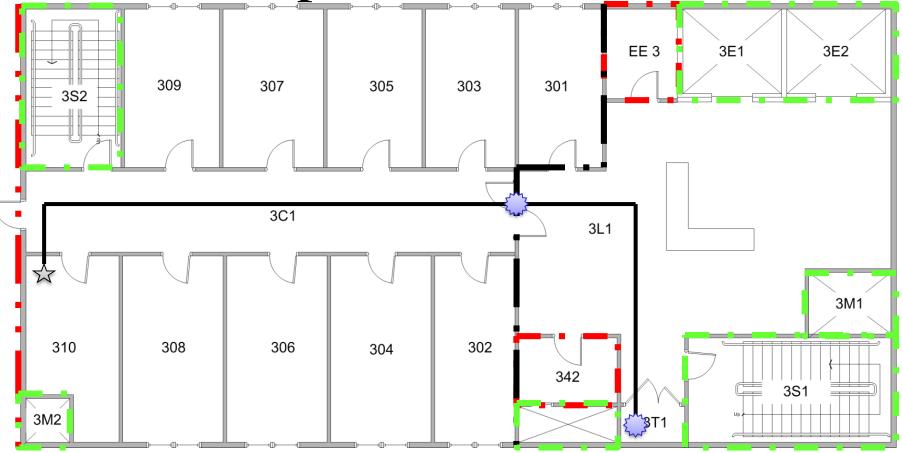

	, <sup>(*):</sup> 3C1	J		Temo H	Hospital		nit No.: 2	011-005	Side 0	
		1/3L1				Side 1: 3C1			Side 2: 3L	
		-B1-03-007					(	Compliance S		on-compliant
	rey ID:							LSR	aroup:	
_	Safety Detail			Plan Diagrams	1	1		1	1	
	LSR Deta	Status	Latest Ph	Detail Description	Life Safety T	Life Safety Sub	Letters	Numbers	LSR Count	Notes
	001	Non-com	- 7	Firestopping Through Wall Penetration - Firestop	Firestopping	Through Wall Pe	WL	1000-1999	1	
(	002	Compliant		Firestopping Through Wall Penetration - Firestop	Firestopping	Through Wall Pe	WL	1000-1999	0	
(	003	Compliant	-	Firestopping Through Wall Penetration - Firestop	Firestopping	Through Wall Pe	WL	5000-5999	1	
(	004	Compliant		Firestopping Through Wall Penetration - Firestop	Firestopping	Through Wall Pe	WL	3000-3999	1	EZ Path
د (				Ш						>
1	\dd New Lif	e Safety Detail	Entry	Edit Selected Life Safe	ety Detail Entry					
		_		_						
E	dit S	Save Sa	ve & Add An	other Save & Close	e Delete Red	cord				Cancel

	Building 1 \ 3rd Floor \ 3C1	Safety Sub Type: Throu	h Wall Penetrati		3-007 - 001
ife Safety Type Firestopping			yn wan renetiau		
Penetration Type: EMT or Conduit Wall Rating Type:	Penetration Size:	Max 1"		Annular Space:	MIN: 0 to .50", MAX:
	ssified System:		Survey #: s	Survey	Survey Date:
Deficiency Description: No firestopping		Suggested CA		-	System at penetration/joint
Survey Notes:		CA Notes:			
Surve	y Photo	<u> </u>		Su	Irvey Photo
Side: 37	296 Photo ID: 37296	Corrective Ac	[   	Sid	e: 2: 3L1 Photo ID: 37297
Side: 1: 3C1 Photo Notes:		Side: 2:	3L1	Photo Notes	:

## Barrier Management Policy Code Guidance

**703.7 Marking and identification.** *Fire walls, fire barriers, fire partitions, smoke barriers and smoke partitions or any* other wall required to have protected openings or penetrations shall be effectively and permanently identified with signs or stenciling. Such identification shall:

1. Be located in accessible concealed floor, floor-ceiling or attic spaces;

2. Be located within 15 feet (4572 mm ) of the end of each wall and at intervals not exceeding 30 feet (9144 mm) measured horizontally along the wall or partition; and

3. Include lettering **not less than 3 inches (76 mm ) in height with a minimum 3/8 inch (9.5 mm) stroke** in a contrasting color incorporating the suggested wording.

"FIRE AND/OR SMOKE BARRIER—PROTECT ALL OPENINGS"

or other wording.

Exception: Walls in Group R-2 occupancies that do

not have a removable decorative ceiling allowing access to the concealed space.



### Barrier Management Policy Tool – Barrier Warnings on ASSEMBLIES – International Building Code – 2009++





- Pre Construction Meetings Education
  - Barrier Markings Mean...
  - Actions when at Barriers Required...
    - Permit required Above Ceiling, Barrier Hole...
    - Infection Control Rules
    - Healthcare facility Rules





- Violation Consequences
  - In House
    - 2 strikes & work reassignment to cleaning...
    - Others...
  - Outside Contractors
    - 2 strikes & not allowed to work above ceilings
    - Others...

• Find Violators....

– Staff Awards

- Ongoing Management
  - Engineering Staff Reviews
  - User Staff Reviews
  - Inside Construction
  - Outside Contractor

- Education Staff Repairs Simple??
  - Fire Doors & Hardware Simple things...
    - Close & Latch
    - Holes in Door
  - Ladder = ?? Permit Sticker?
  - Fire Rated Walls Holes
    - Accidental
    - Workers

- Budgets...
  - Sprinkler Maintenance
  - Alarms Maintenance
  - Security
  - Fire and Smoke Resistant Assemblies
    - Doors
    - Dampers
    - Firestops
    - Glazing
    - Walls/Floors

## "TOTAL FIRE PROTECTION"


- Effective Compartmentation
  - Fire Barriers, Fire Walls/Floors, Smoke Barriers
  - Firestopping, Fire Dampers, Swinging and Rolling Fire Doors, Fire Rated Glazing
- Detection & Alarm Systems
- Sprinkler Suppression Systems
- Education & Egress-
  - Building Owners & Managers, Building Occupants and Firefighters









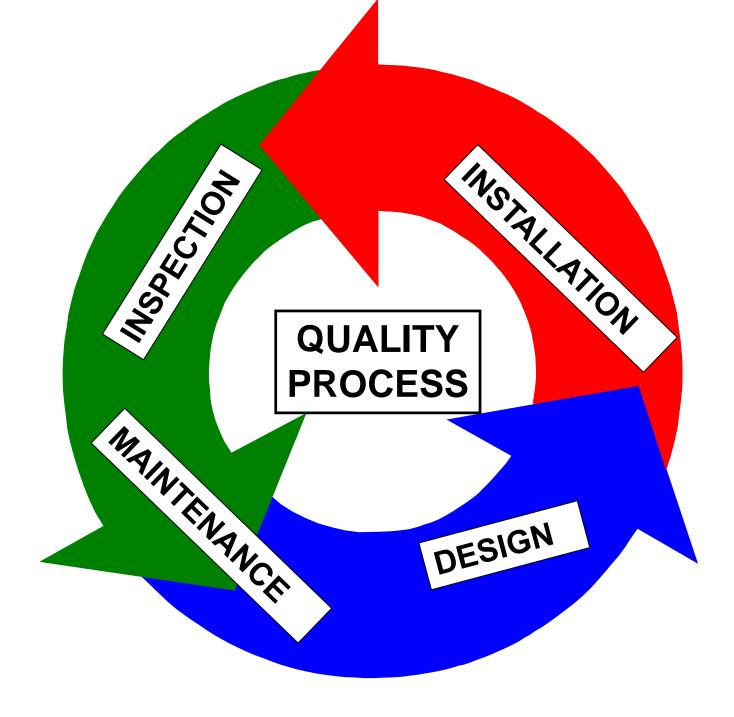


## "DIIM"

- Barriers are for Safety DIIM
  - Properly *Designed* and Specified
    - Tested and Listed Systems Directories,
  - Professional *Installation* Companies
  - Properly *Inspected* Commissioned
  - Maintained Annually -
    - NFPA 101
    - International Fire Code
    - International Property Maintenance Code
    - It's required by Code
    - Minimize Liability
    - Protect Occupants

#### **Effective Compartmentation** is a SYSTEM







New UL test standards for Life Safety Dampers will take effect in July 2002









#### Contacts

#### Firestop Contractors International Association Hillside, IL – +1-708-202-1108 - office Bill McHugh – bill @ fcia.org

#### **FCIA Webinar**

#### Who is FCIA Barrier Management Systems © FCIA 2017

